Penthouse Louver • 6" Blade Width • Stationary Straight Blades • Miter Corner • Extruded Aluminum

Page 1

## ANGLES - All corners and intermediate to Interior Fastening Installation extend from roof into curb. Removable Insulation Extruded Flat Roof Blade 00 00 2" x 2" x 1/4" thk. Aluminum Angle 00 Removable Roof "H" Optional Sloped Roof <u>Available</u> Mitered Corner Detail Welded Miter "A" O.D. (in.) Curb by Others Aluminum Curb Cap (Typ.) "C" I.D. "B" O.D. Extruded (in.) (in.) Blades "D" I.D. (in.)

Specifications

MATERIAL: .081" thick (nominal) or .125" thick (nominal) extruded aluminum, 6063-T52/T6 alloy, with reinforcing rib bosses.

ROOF: ..060" thick (nominal) sheet aluminum removable roof, reinforced with aluminum bracing where required to take a snow

Continuous angle at the four corners and intermediate as required.

load of 40 lbs./sq.ft., plus a required safety factor.

**SCREENS:** (When indicated)

Bird Screen - 1/2" square mesh, 19 GA. galvanized steel, on interior.

**INSULATION:** Underside of roof is lined with  $\frac{1}{2}$ " thick insulation.

NOTES: Penthouse dimensions "A" or "B" exceeding 84" shall be shipped in sections for field assembly by others.


Item #	Qty	А	В	С	D	Н	Mullion	Туре	Location		
		Penthouse Dimensions					Iviuilion	Screens			<u>Union Made</u>
Arch. / Eng. :						EDR:		ECN:		Job:	
Contractor:											
Project:						Date:		DWN:		DWG:	

In the interest of product development, Cesco Products reserves the right to make changes without notice.



Penthouse Louver • 6" Blade Width • Stationary Straight Blades • Miter Corner • Extruded Aluminum

Page 2

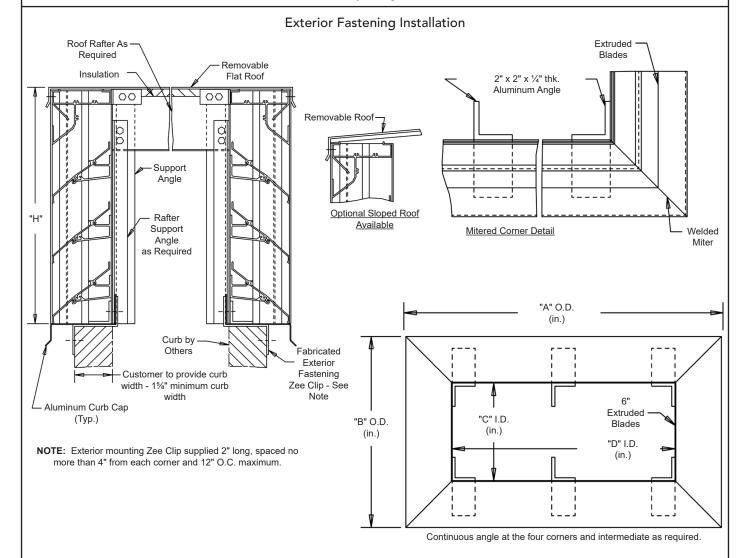

Specifications

MATERIAL: .081" thick (nominal) or .125" thick (nominal) extruded aluminum, 6063-T52/T6 alloy, with reinforcing rib bosses.

ROOF: ..060" thick (nominal) sheet aluminum removable roof, reinforced with aluminum bracing where required to take a snow

load of 40 lbs./sq.ft., plus a required safety factor.

**SCREENS:** (When indicated)

Bird Screen - 1/2" square mesh, 19 GA. galvanized steel, on interior.

**INSULATION:** Underside of roof is lined with ½" thick insulation.

NOTES: Penthouse dimensions "A" or "B" exceeding 84" shall be shipped in sections for field assembly by others.

Item #	Qty	А	В	С	D	Н	Mullian	Туре	Location		00
		Penthouse Dimensions					Mullion	Screens			<u>Union Made</u>
Arch. / Eng. :						EDR:		ECN:		Job:	
Contractor:											
Project:						Date:		DWN:		DWG:	

