MODEL EAC - ESC

Equipment Support • Standard Cant • Aluminum or Steel

Page 1

Standard Construction and Materials

Formed Aluminum Equipment Support

SHELL &

BASEPLATE: .063" thick (nominal) aluminum alloy 3003-H14. All

seams are fully welded and sprayed with protective

coating.

CANT: Mitered 3" x 3" integral cant.

REINFORCEMENTS: On 12" centers.

NAILER: Varies by width, factory installed.

FINISH: Mill.

Formed Steel Curb Equipment Support

SHELL &

BASEPLATE: 18 GA. galvanized steel. All seams are fully welded

and sprayed with protective coating.

CANT: Mitered 3" x 3" integral cant. **REINFORCEMENTS:** On 12" centers.

NAILER: Varies by width, factory installed.

FINISH: Mill.

Options

Aluminum Material - Available in .081" - .125" thick 3003-H14 alloy **Steel Material** - Available in various gauges of galvanized, galvaneal or stainless

Pitched or Peaked - In conjunction with the overall dimensions, both the height rise, specified in linear inches per foot (ex: 3" in 12") and the direction of the pitch must be specified.

Counterflashing - A removable metal cap fabricated of the same material as the equipment support provides for an effective method of attaching roofing felts.

Gasket - ¼" thick polyurethane foam gasket can be installed, lining the entire top perimeter. Gasket can be used in place of, or in addition to a wood nailer.


Finishes - A wide selection of finishes include baked enamel, epoxy, or prime coat.


Notes

- 1. "A" and "B" are opening dimensions.
- 2. If height or width exceed 90", multi-section construction may be required.

Equipment Support Width

| Nominal Width | Actual Nailer Width | | | | | |
|------------------|------------------------|--|--|--|--|--|
| 4" | 3½" | | | | | |
| 6" | 5½" | | | | | |
| 8" | 7½" | | | | | |
| 10" | 9½" | | | | | |
| 12" | 11½" | | | | | |

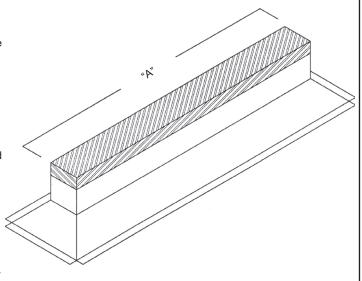



| ltem # | Qty | "A" | "B" | Wid | dth | Aluminum | Steel | Height Rise | Direction | NA. S | |
|---------------|-----|--------------------|-----|-------|----------|----------|--------------|-------------|-------------------|-------|--|
| | | Opening Dimensions | | | Material | | Pitch / Peak | | <u>Union Made</u> | | |
| Arch. / Eng.: | | | | EDR: | | ECN: | | Job: | | | |
| Contractor: | | | | | | | | | | | |
| Project: | | | | Date: | | DWN: | | DWG: | | | |

In the interest of product development, Cesco Products reserves the right to make changes without notice.



450 Riverside Dr • Wyalusing PA, 18853 Phone: 570-746-1888 • Fax: 570-746-9286 www.cescoproducts.com